



“Aru Nordic 92 IN” window is a combination of a superb design and energy efficiency. High quality timber profiles and unique 52 mm triple glazing unit offer great protection from cold during winter and heat in summer months, holding back unwanted outside noise at the same time. The owner of “Aru Nordic 92 IN” windows can enjoy excellent product choice without excessive maintenance care for many years



A three-layered deep-impregnated window, the bottom frame and sash are protected with aluminium glazing beads. There's an option of using concealed hinges and design Available with a choice of handles.

Aru NORDIC 92 IN

INWARD OPENING, TILT AND TURN VACUUM DEEP-IMPREGNATED WOODEN WINDOW

Standard window thermal transmittance $U_w=0,74 \text{ W/m}^2\text{K}$

PROFILE IV92

Jamb: 92 x 78 mm

Frame: 92 x 78 mm

Inside groove for windowboard, outside for aluminium cill
Aluminium slat on the lower part of the frame

FURNITUR

Fittings: ROTO NT

Handle: ROTO, HOPPE



GLASS

Triple glazing 52 mm ($U_g \geq 0,47 \text{ W/m}^2\text{K}$)

Glazing from the inside with wooden glazing beads


Fastened with hidden nails, sealed with silicone and seals

SEAL


2-chamber seal surrounding middle frame rebate

FINISHING

with water-based paint or stain

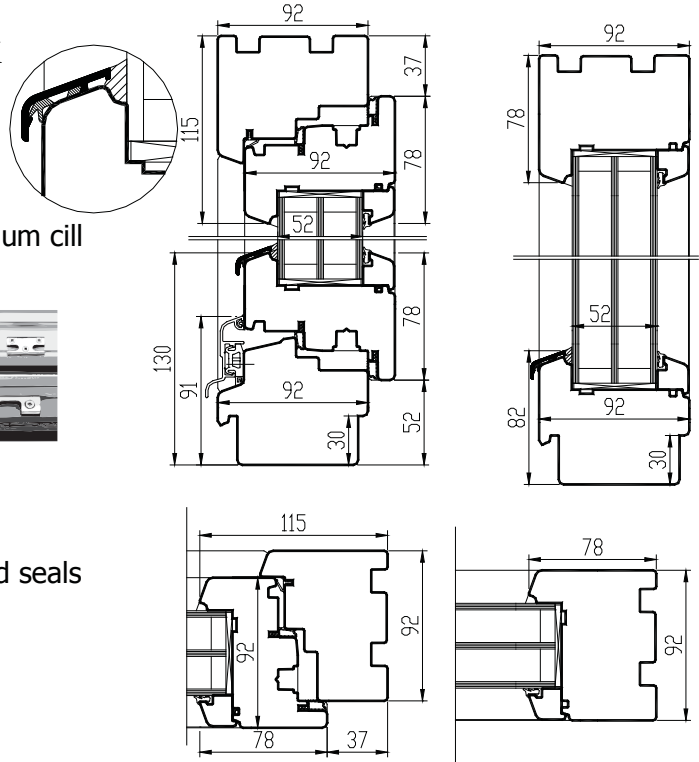

Handle positions



tilt






microventilation



turn




closed




GLAZING BAR OPTIONS

1. Penetrating bars 50 mm
2. Bar frame on the hinges
3. Taped bars Norwegian style
4. Taped bars Georgian style

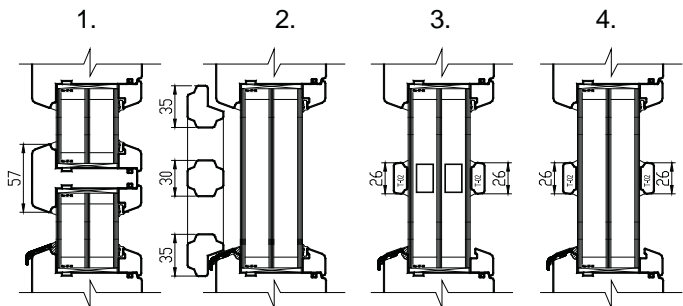


OPENING:

Inside view




F - FIXED

2x or 3x glazing in the frame. Aluminium slat on the lower part of the frame
min measures 330 x 330 mm




DK - TILT AND TURN (LEFT / RIGHT)

min max L=550...1710 mm H=565...2527 mm, weight max 130 kg



D - SIDEHUNG (LEFT / RIGHT)

min max L=550...1710 mm H=565...2527 mm, weight max 130 kg




KIPP - TOPHUNG (Handle above)

min max L=550...2510 mm H=565...1327 mm, weight max 80 kg

NB! Maximum and minimum dimensions and opening possibilities also depend on the aspect ratio.
Please ask our specialists for additional information.

Triangular window



Round-headed window

